

### Facestock

A semi-gloss, two side machine coated, calendered white printing paper.

Basis Weight	85 g/m <sup>2</sup>	ISO 536
Caliper	73 µm	ISO 534

### Adhesive

R450 is a removable adhesive featuring excellent long term removability.

### Liner

A high strength clay-coated kraft paper with good dimensional stability, toughness and tear resistance, as well as good layflat.

Basis Weight	130 g/m <sup>2</sup>	ISO 536
Caliper	130 µm	ISO 534

### Laminate

Total Caliper:	218 µm ± 10%	Calculated
----------------	--------------	------------

### Typical Performance Data

Initial Tack	150 N/m	FTM 9 glass
Peel Adhes. 90°	100 N/m	FTM 2 st.st.
Min. appl. temp.	-15°C	
Service temp.	-30°C to 70°C subject to facestock limitations	

*Note: Typical Performance Data only serves as reference to product performance under specified testing conditions and does not represent a product specification. Customers are recommended to test under actual conditions of use to determine its suitability.*

### Applications and Use

This product is suitable for a wide range of promotional and industrial labels applications whereby attractive semi-gloss appearance with heavy multicolor ink coverage work and clean removability are required.



R450 is a general purpose removable adhesive featuring excellent removability on a wide range of substrates over a period of time depending on type of substrates. Therefore, preliminary testing is essential prior using the product. Typical applications include labels for cosmetic, pharmaceutical and food products industry.

### Conversion/Printing

The facestock provides excellent print quality by all the usual printing techniques. The semi-gloss surface offers excellent print quality especially with letterpress and flexo. High internal strength of the glassine liner provides excellent support for die cutting both rotary and flat bed.

## SMP8261

### Fasson® Fascoat Elite FSC/R450/ CCK130 Imp

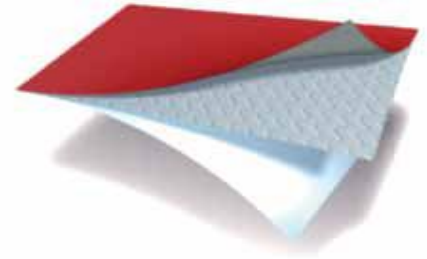

### Food Industry Labels

The adhesive complies with FDA regulations (section 175.105) for indirect food contact.

### Statement of Practical Use

As with all pressure sensitive materials, this product should be tested thoroughly under end-use conditions to ensure it meets the requirements of the specific application.

### Shelf Life

To obtain optimal performance, use this product within one year of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50% RH). Prolonged storage outside these conditions might reduce the shelf life.

### Thailand

110/1 Moo 1 Tumbol  
Srisajarakhe Yai  
Amphur Bangsaothong  
Samutprakarn  
10570  
Thailand

### Malaysia

No. 37 & 38,  
Jalan P4/6 Section 4,  
Bandar Teknologi Kajang,  
43500 Semenyih Selangor  
Malaysia

### Indonesia

Kawasan Industri Jababeka  
Tahap 7 Blok B No 5,  
Desa Wangunharja,  
Kecamatan Cikarang Utara,  
Kabupaten Bekasi 17550 -  
Indonesia

### Vietnam (HCM)

Lot I-11, CN13 Road  
Industrial Group 1  
Tan Binh Industrial Park  
Ward Son Ky  
Tan Phu District  
Ho Chi Minh City Vietnam

### Vietnam (Bac Ninh)

RBF - XY, No. 6,  
Street 15, VSIP Bac Ninh,  
Tien Du, Bac Ninh,  
Vietnam

### Singapore

5B, Toh Guan Road East,  
#05-03, 608829  
Singapore.

### Philippines

Unit 2925  
L29 Joy Nostalq Center 17  
ADB Avenue  
Ortigas Center  
Pasig Center 1600  
Philippines

#### Warranty

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way liable or responsible for consequential or incidental damages.

NO EXPRESS WARRANTIES, WHETHER OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR USE, OR OTHERWISE, EXCEPT AS SET FORTH ABOVE (WHICH IS MADE EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES) SHALL APPLY TO PRODUCTS SOLD BY AVERY DENNISON. AVERY DENNISON SPECIFICALLY DISCLAIMS AND EXCLUDES ALL OTHER SUCH WARRANTIES. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON. No salesman, representative, or agent of AVERY DENNISON is authorized to give any guarantee, warranty or make any representation contrary to the above.