



**AW2403**

**Fasson® Semigloss72  
Sheet/S1800/CCK86Wh  
IMP**

**A bright white, machine  
coated paper.**

## Applications



## Salient Features

- **Robust construction and packaging, suitable for ready to print sheet application.**
- **Low adhesive build-up on presses.**
- **Smooth print surface prolongs machine's life span.**
- **Quick ink drying time with good ink anchorage.**
- **Optimum adhesion on wide range of substrates.**
- **Good short term re-position ability.**
- **Consistent quality enabling high converting and printing efficiency.**
- **Defined Service guidelines.**

### Facestock

A bright white, machine coated paper exhibiting excellent printing characteristics.

Basis Weight: 72 gsm ± 10% ISO 536  
Caliper: 58 µm ± 10% ISO 534

### Adhesive

S1800 is a general purpose permanent, emulsion acrylic adhesive.

### Liner

A clay coated kraft liner featuring excellent strength characteristics.

Basis Weight: 86 gsm ± 10% ISO 536  
Caliper: 86 µm ± 10% ISO 534

### Laminate

Total Construction Caliper 173 µm ± 10%

### Performance data

Initial Tack 410 N/m FTM 9 glass  
Peel Adhes.90° 335 N/m FTM 2 st. st.  
Min. Appl. Temp. 5°C  
Service Temp. -20°C to 80°C

### Applications and use

Typical applications include general purpose labels for cosmetics, toiletries and other health and beauty aid products, promotional labeling and shipper labels for corrugated boxes.

### Conversion/printing

The product is engineered to provide good lay flat characteristics desired for optimum performance in sheet applications. The product is suited to single and/or multicolor line printing by offset, screen and digital. The product showcases excellent die cutting characteristics.

A higher gloss finish can be achieved by additional varnishing or over laminating.

**Exposure of sheets to high humidity conditions should be minimized.**


### Shelf life

Two years when stored at 22°C at 50% RH.

## AW2403

### Fasson®

### Semigloss72 Sheet/S1800/CCK86Wh IMP

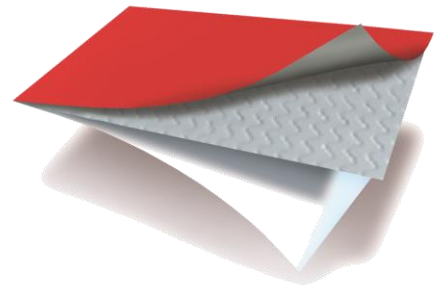

Semigloss72 Sheet

S1800

CCK86Wh IMP

## Avery Dennison India Pvt. Ltd.

### Gurgaon :

Narsinghpur Industrial Area,  
Delhi – Jaipur Highway,  
District Gurgaon, Haryana.  
India. 122001

Tel: +91 124 4351200

### Pune :

G-5, MIDC Ranjangaon Industrial Area,  
Taluka - Shirur,  
District – Pune, Maharashtra  
India. 412220

Tel: +91 2138 664200

### Bengaluru :

Plot No. 18 & 23, Peenya Industrial Area,  
Phase-I, Yeshwantpur Hobli,  
District – Bengaluru, Karnataka  
India. 560058

Tel: +91 80 43316888

### Warranty

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way

liable or responsible for consequential or incidental damages. NO EXPRESS WARRANTIES, WHETHER OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR USE, OR OTHERWISE, EXCEPT AS SET FORTH ABOVE (WHICH IS MADE EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES) SHALL APPLY TO PRODUCTS SOLD BY AVERY DENNISON. AVERY DENNISON SPECIFICALLY DISCLAIMS AND EXCLUDES ALL OTHER SUCH WARRANTIES. NO WAIVER, ALTERNATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON. No salesman, representative, or agent of AVERY DENNISON is authorized to give any guarantee, warranty or make any representation contrary to the above.